

FLUA®



ADRAY RO SINGLE



The irradiation angle can be adjusted manually. Mounting different locations with the products, put multiple splice angle, makes different lighting effects, using your imagination, There are two kinds of radius shape frames, variety of colors. Users can change the frame freely.

Designer	FLUA
Sales status	On Sale
Product classification	Interior
Model	418419A

Installation information

Area	Wall
Method	Surface Mounted
Cut hole size	/
Embedded height	/

Technical general

System power	7.7W	
Flux	379lm	
Beam angle	A	
Material	Aluminum	
Appearance color	PAW	
Size	Φ120*90mm	
Adjustable angle	Available	
Ingress protection	IP20	
Input voltage	100-240VAC	50/60Hz
Electrical level	Class I	

Electrical parameters

Driver brand	DRIARTE
Driver type	FLMN9W350T(5 years)
Electrical installation	Build in


Light source parameters

Brand	SUNPU
Type	G12-303H
Power	6.8W
Light color	WW
Color temperature	3000K
CRI	80


Other options

Beam angle	/
Color temperature	2700K 4000K
Color	/
Appearance color	PBK-PCS

3D module



Line drawing

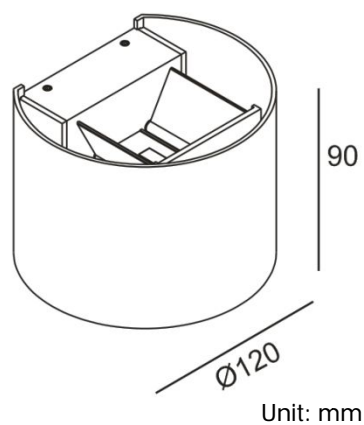

Instructions

