




**Product Information** IES files, certifications and approvals available on request

Modern design, high output, semi-recessed adjustable LED architectural downlight. Suitable for high to medium ceilings. 350 degree horizontal, 60 degree vertical adjustability will highlight every featured wall or display. Broad variety of power outputs, colour temperatures, beam angles and customisations for every architectural or residential application. Features dedicated remotely located control gear suitable for all dimming protocols. Standard 5 year warranty.

**Product Images** More images and drawings available on request

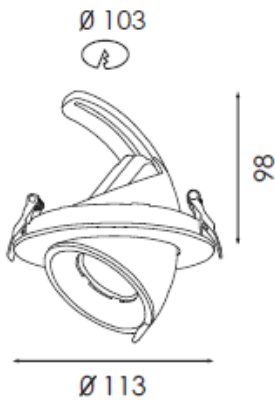

**LED Specification** Citizen / Lumileds / Bridgelux alternatives available on request

BRAND	TYPE	LED CCT	LED CRI	DRIVE CURRENT	LED POWER	OUTPUT
CREE	CXA	2700K – 6000K	80 - 90	150 – 350mA	11.2W @ 350mA	100lm/W min

**Luminaire Specification** Customisations available on request

HEIGHT	TRIM	CUT OUT	MATERIAL	FINISH TYPE	MOUNTING	IP RATING
98mm	113mm diameter	103mm diameter	Machined aluminium	Powder coat	Semi-recessed	IP20

**Product Code Generator** example 2003.C3AM2.1

MODEL	SYSTEM POWER	LED CCT	LED CRI	BEAM ANGLE	FINISH	DIMMING
2003. LOMBARDY	A 8W	2 2700K	A 80	UN Ultra Narrow 15°	0. Silver	0 No dimming
	B 12W	3 3000K	B 90	N Narrow 24°	1. White	1 Phase dimming
	C 14W	4 4000K		M Medium 36°	2. Black	2 DALI dimming
		5 5000K		W Wide 60°	3. Custom	3 0-10V dimming
		6 6000K				

**Ordering Information** Please fill-up as per Product Code Generator

2003.						
-------	--	--	--	--	--	--