


Product Information IES files, certifications and approvals available on request

Modern minimalist design, COB LED, deep-recessed fixed architectural downlight. Suitable for residential and commercial applications with low to high ceilings. Broad variety of power outputs, colour temperatures, beam angles and interchangeable colour baffle for every architectural or residential application. Features dedicated remotely located control gear which can be selected to suit all dimming protocols. Standard 3 year warranty. Optional 5 year warranty available.

Product Images More images and drawings available on request

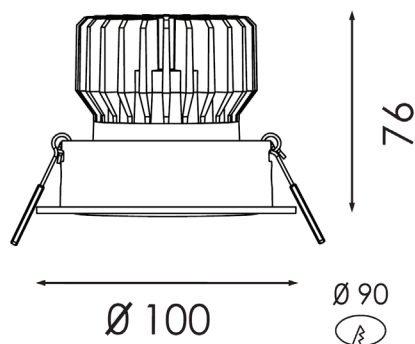

LED Specification Citizen / Lumileds / Bridgelux alternatives available on request

BRAND	TYPE	LED CCT	LED CRI	DRIVE CURRENT	LED POWER	OUTPUT
CREE	CXB	2700K – 5000K	80 / 90	180 – 350mA	12.6W @ 350mA	135lm/W Typ CRI80

Luminaire Specification Customisations available on request

HEIGHT	TRIM	CUT OUT	MATERIAL	FINISH TYPE	MOUNTING	IP RATING
76mm	100mm diameter	90mm diameter	Machined Aluminium	Textured Powder coat	Recessed	IP20

Product Code Generator example 2090.C3AM1.1.1

MODEL	SYSTEM POWER	LED CCT	LED CRI	BEAM ANGLE	FINISH - TRIM	FINISH - BAFFLE	DIMMING	
2090. APRILIA 14	A 8.4W	2 2700K	A 90	UN Ultra Narrow 15°	0. White	0. White	0 On/Off	
	B 11.6W	3 3000K	B 80	N Narrow 24°	1. Black	1. Black	1 Phase dimming	
	C 15W	4 3500K			M Medium 36°	2. Custom	2. Gold	2 DALI dimming
		5 4000K			W Wide 50°		3. Chrome	3 1-10V dimming
		6 5000K					4. Black Chrome	

Ordering Information Please fill out as per Product Code Generator

2090.							
-------	--	--	--	--	--	--	--