

FLUA®



FOCUS S+ AD



This series is deep hidden and its anti-glare effect is very good. The adjustable irradiation angle makes the light dual with straight rays and shines. Suitable for homes, restaurants, cafes and bedrooms. Combined with three parts: honey comb, textured glass and ruled glass. Users can collocate according to different application.

Designer	QL-Y
Sales status	On Sale
Product classification	Interior
Model	193519EA


Installation information

Area	Ceiling
Method	Recessed
Cut hole size	Φ72mm
Embedded height	/

Technical general

System power	12W	
Flux	612lm	
Beam angle	38°	
Material	Aluminum	
Appearance color	PAW-PAB	
Size	Φ78*70mm	
Adjustable angle	Available	
Ingress protection	IP20	
Input voltage	220-240VAC	50/60Hz
Electrical level	Class II	

Photometric graph

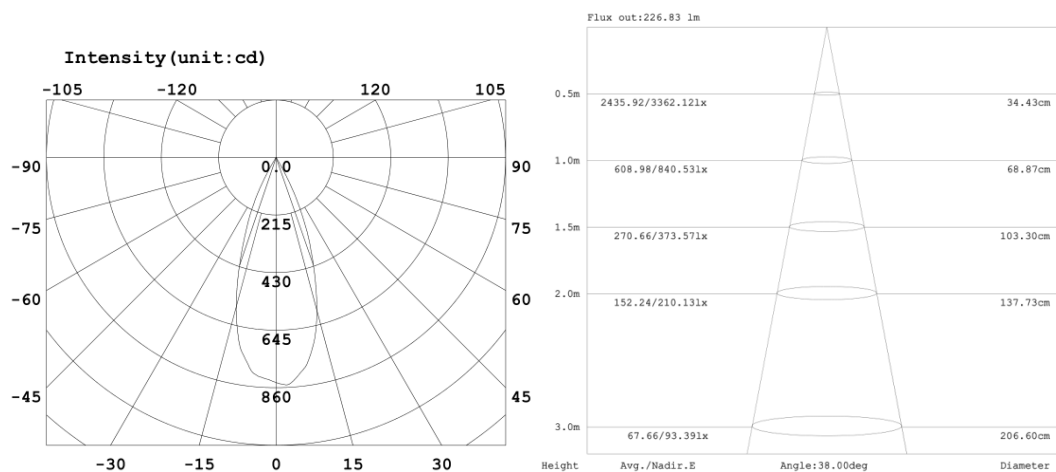

Electrical parameters

Driver brand	TRIDONIC
Driver type	LC 10W 350mA
Electrical installation	External

Light source parameters


Brand	FLUA
Type	G111C-010A
Power	10.15W
Light color	WW
Color temperature	3000K
CRI	90

Other options

Beam angle	18°
Color temperature	4000K 5000K
Color	/
Appearance color	PAW-WGL/PAW-WSG/PAB-PAW/PAB-WGL/ PAB-WSG
Dimming model	193519EDT(POWER=10.4W)
Dimming mode	TRIAC dimming
Driver brand	ACTEC
Driver type	D30009NT
Input voltage	220-240VAC 50/60Hz

3D module

Line drawing

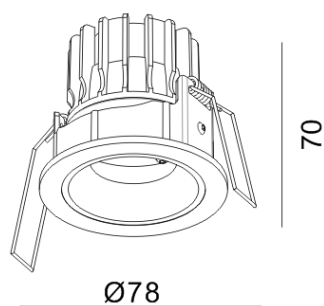

Unit: mm

Instructions

