

Product Information

IES files available on request

Introducing VOODOOFLEX RGBW from our URBAN LINES collection—an exceptional range of professional-grade LED strips. With years of expertise in flexible LED strip lighting and a keen focus on addressing user requirements, VOODOOFLEX RGBW represents the pinnacle of innovation.

Featuring a dual layer heavy copper FPCB, meticulously designed to minimize voltage drop and enhance the transfer of heat. This engineering feat ensures optimal performance and durability.


For unbeatable adhesion to various surfaces, we employ commercial grade 3M VHB double-sided adhesive. This reliable bonding agent guarantees a secure and long-lasting attachment, whilst offering vibration dampening providing peace of mind even in the most demanding applications.

Moreover, our high-density SMD LED design sets VOODOOFLEX apart, substantially reducing visible dotting when installed within an aluminum profile. This thoughtful engineering creates a seamless lighting experience, free from distracting imperfections.

Whether you're an industry professional or a discerning user seeking top-notch LED strip lighting, VOODOOFLEX RGB & RGBW surpasses expectations, combining advanced technology, exceptional reliability, and stunning visual appeal.

Product Images

More images and drawings available on request

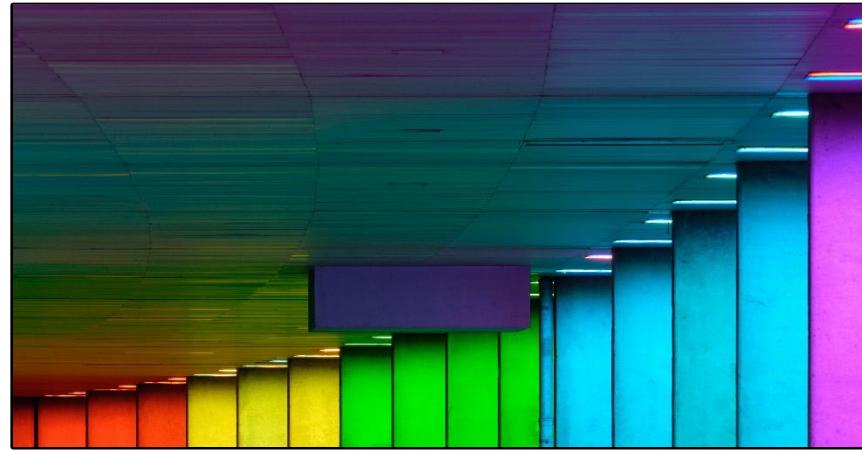

LED Strip Specification

Other LED alternatives available on request

TYPE	SMD LED LIFE	LED CCT	LED CRI	OPERATION TYPE	POWER PER/M	LUMEN PER/M
EPISTAR	>50,000hrs L80/F50	RGB + White 2700k/3000k	CRI90 (Whites)	24V DC (CV) SELV	20w	1020lm RGBW 100%

Strip Specification

Customisations available on request

TYPE	HEIGHT	WIDTH	LENGTH	Material	MOUNTING
Surface mount Flexible LED strip	2mm IP65S 14mm	IP20/IP55N 10mm	50-5000mm Max connection 5m	Rolled copper FPCB	Peel and stick 3M VHB tape.

Product Code Generator

Example VF5-20-RGBW3-20 (VOODOOFLEX 20w/m RGB+3000k IP20)

MODEL	WATTAGE PER/M	LED CCT	IP RATING
VF5. VOODOOFLEX Gen5	20. 20 Watt	RGBW2. Red + Green + Blue + White 2700k RGBW3. Red + Green + Blue + White 3000k	20. IP20 55N. IP55 NANO 65S. IP65 Silicone tube

Ordering Information

Please fill out as per Product Code Generator

VF5. 20.