


Product Information IES files available on request

TINY TIM is a architectural grade tiny LED profile measuring only 9mm high by 8mm wide. High density LED design provides a homogenous “no dotting” smooth illumination. This product also has a high colour rendition of CRI90+, providing excellent colours true to natural vibrant form. TINY TIM can be surface mounted with stainless steel mounting brackets, or recessed into joinery & glued in place for a sleek trimless design. Requires remotely located 24V DC control gear. DALI, Analogue 1-10v, Phase cut dimming, and CASAMBI dimming protocols are available on request. Standard 3 year warranty.

Product Images More images and drawings available on request

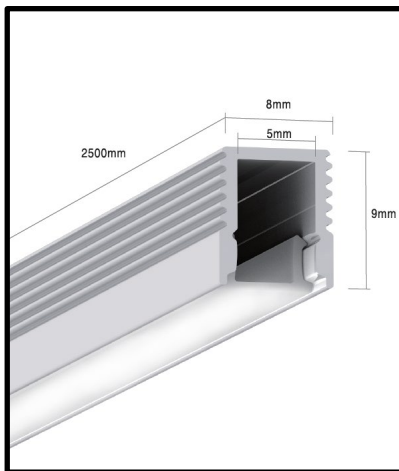

LED Specification Other LED alternatives available on request

LED TYPE	LED ENGINE LIFE	LED CCT	LED CRI	DRIVER TYPE	LED EFFICIENCY	PCB WIDTH
2216	>50,000hrs L80/B50	2400K – 6500K	90+ (3 Step MacAdam)	Constant Voltage 24V	90lm/w Typ.	5mm
4040	>40,000hrs L70/B50	RGB	N/A RGB	Constant Voltage 24V	45lm/w Typ.	5mm

Profile Length Specification Example: 1008mm Length 3000k single power feed = (30 x 33.3mm + 9mm)

TYPE	LED PER/M	WATTAGE	DIMMENSIONS (MM)	INCREMENTAL LENGHT	SINGLE FEED	DOUBLE FEED
2700 – 6500k	180	4.8W – 14.4W/m	8(W)x9(H)x76.6-2500(L)	33.3mm	+ 10mm	+ 16mm
RGB	120	9W/m	8(W)x9(H)x114-2500(L)	50mm	+ 14mm	+ 24mm

Note: Our LED extrusions can be cut to any size in 1mm increments. If no light gap is preferred, please use above incremental length measurements.

Product Code Generator Example: TT0809.WH.W10.30K.20.L1000.F03S (White 9.6W 3000k IP20 1000mm single 300mm wire)

MODEL	FINISH	WATTAGE	LED CCT	IP RATING (LED STRIP)	LENGTH (MM)*	CONNECTION TYPE
TT0809. TINY TIM	AN. Anodised	W05. 4.8W/m*	24K. 2400K*	20. IP20 Dry location	L1000. 1000mm	F03S. Single end wire 0.3m
	WH. White	W10. 9.6W/m	27K. 2700K	55N. IP55 Nano	L2500. 2500mm	F03D. Double end wire 0.3m
	BK. Black	W15. 14.4W/m	30K. 3000K		XXXX. Custom	F30S. Single end wire 3m
	CU. Custom finish	R15. RGB (14.4w/m)*	40K. 4000K			C01S. Single M&F plug 0.1m
			50K. 5000K			C01D. Double M&F plug 0.1m
			65K. 6500K			C03S. Single M&F plug 0.3m
						C03D. Double M&F plug 0.3m

* Denotes special order item, minimum order quantity or special terms will apply. Please contact us for more info.

Ordering Information Please fill out as per Product Code Generator

TT0809.						
---------	--	--	--	--	--	--